

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

ROBY

SMALL SIZE



E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna quadra E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

| | | | |
|---------------------------------|-----------------|----------------------------|--------|
| | | | |
| 6,5W 800 lm | 8,5W 920 lm | 11W 1200 lm | |
| 2700 K | 2700 K | 4000 K | 6500 K |
| +80°C -30° | 90% HUMIDITY | VOLTAGE SURGE RESISTANT | |
| INDOOR & OUTDOOR USE | | | |



T20.240.V1K

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
| | | | | | |
| | | | | | |





ROBY - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** provided with silicone rubber gasket to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo completo di guarnizione in gomma siliconica applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ROBY

T20.000 *



Dimensions and weight

Height: 210 mm
Width: 200 mm
Depth: 200 mm
Weight: 0,8 Kg

Moulded colours:

Black White
Grey

Diffuser PMMA:

Clear Opal

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD. SUFFIX

| suitable lamps: CFL-LED max 150 mm | | E27 lampholder only | | .E27 |
|--|-------|-------------------------------|----------------------------|------|
| LAMP | POWER | LUMINOUS FLUX UP TO | COLOUR TEMP. | |
| FILAMENT LED E27 | 6,5W | 800 lm | 2700 K | .F1R |
| CCT SET LED E27 | 8,5 W | 920 lm | 6500 K 4000 K 2700 K | .V1K |


- perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

6,5W filament = 60W incandescent
8,5W CCT


SAVE up to 89%

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP(*)



PHOTOMETRIC DATA SAMPLE

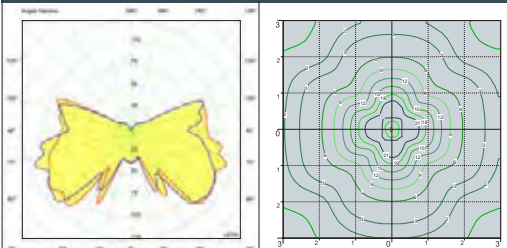

ROBY lantern clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ROBY

SMALL SIZE



MADE IN ITALY



NARDO/ROBY

| | |
|-----------------------|-------------|
| E27 lampholder | T20.240.E27 |
| 6,5W filament | T20.240.F1R |
| 8,5W CCT set | T20.240.V1K |

Pcs 18
Kg 17,8
mc 0,207

SICAR/ROBY

| | |
|-----------------------|-------------|
| E27 lampholder | T20.125.E27 |
| 6,5W filament | T20.125.F1R |
| 8,5W CCT set | T20.125.V1K |

Pcs 18
Kg 20,6
mc 0,207

ROBY

T20.000

Pcs 1
Kg 0,8
mc 0,011

DISMA/ROBY

| | |
|-----------------------|-------------|
| E27 lampholder | T20.114.E27 |
| 6,5W filament | T20.114.F1R |
| 8,5W CCT set | T20.114.V1K |

Pcs 18
Kg 17,1
mc 0,207

GIAFFA/ROBY resin

| | |
|-----------------------|-------------|
| E27 lampholder | T20.242.E27 |
| 6,5W filament | T20.242.F1R |
| 8,5W CCT set | T20.242.V1K |

Pcs 1
Kg 1,9
mc 0,048

LAMPS
POST
URBAN MODERN
URBAN REVIVAL
URBAN CLASSIC
SOLAR
BULKHEAD
FLOODLIGHT
BRICKLIGHT
IN-GROUND
DOWNLIGHT
UP&DOWN
BOLLARD
GARDEN CLASSIC
GARDEN REVIVAL

ROBY

SMALL SIZE



T20.306.D30.V1K



T20.240.V1K



T20.305.D20.V1K

MADE IN ITALY



| DANILO NARDO/ROBY 2L | |
|------------------------------|-----------------|
| E27 lampholder | T20.305.D20.E27 |
| 6,5W filament | T20.305.D20.F1R |
| 8,5W CCT set | T20.305.D20.V1K |
| Pcs 1 Kg 10,9 mc 0,176 | |

590

1670

Ø 245

2

| DANILO NARDO/ROBY 3L | |
|------------------------------|-----------------|
| E27 lampholder | T20.305.D30.E27 |
| 6,5W filament | T20.305.D30.F1R |
| 8,5W CCT set | T20.305.D30.V1K |
| Pcs 1 Kg 11,6 mc 0,176 | |

550

1670

Ø 245

3

| DINO NARDO/ROBY 2L | |
|------------------------------|-----------------|
| E27 lampholder | T20.306.D20.E27 |
| 6,5W filament | T20.306.D20.F1R |
| 8,5W CCT set | T20.306.D20.V1K |
| Pcs 1 Kg 11,3 mc 0,182 | |

590

1920

Ø 245

2

| DINO NARDO/ROBY 3L | |
|------------------------------|-----------------|
| E27 lampholder | T20.306.D30.E27 |
| 6,5W filament | T20.306.D30.F1R |
| 8,5W CCT set | T20.306.D30.V1K |
| Pcs 1 Kg 12,4 mc 0,182 | |

550

1920

Ø 245

3