
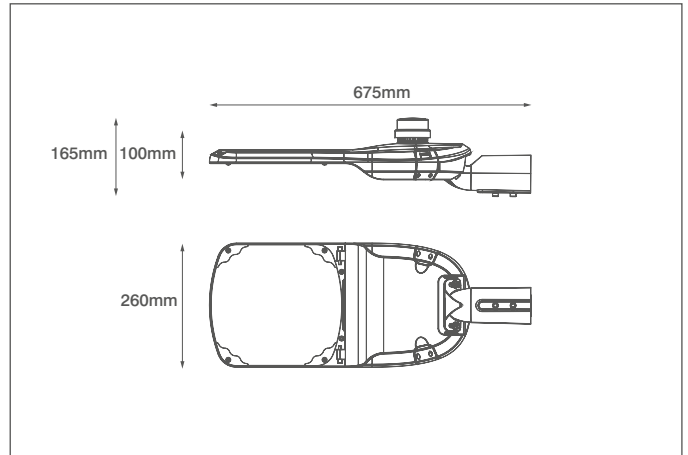


Description: 135W LED Street Luminaire (Nema 3 Pin) IP66 CCT Switch Grey

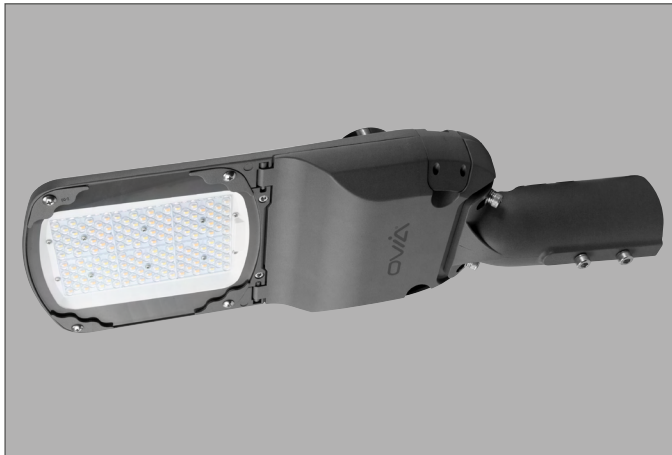

General Information

Dimensions (mm)	675 (L) x 260 (W) x 100 (D)
Spigot Diameter (mm)	76
Materials	Body: Powder Coated Aluminium; Diffuser: Glass
Colour	Light Grey (RAL7037)
Product Weight (Kg)	5.4
Ingress Protection	IP66
Impact Rating (IK)	10
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	100-277 (50/60)
Safety Class	I
Surge Protection Installed	Yes
Circuit Wattage (W)	135
LED Wattage (W)	135
Inrush Current	75A (332uS@230V~)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +50
Maximum Critical Temperature (°C)	+90
Input Terminations	3 Pole Screw Terminals

Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	18800	20500	18800
Efficacy (lm/W)	140	155	140
Beam Angle (°)	85 x 150 (Type II M)		
Colour Rendering Index (CRI)	>70		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	No
----------	----

Compatible Accessories

OV113PC - 3 Pin IP65 Photocell
OV113WB - 1175mm Wall Bracket - Grey

Additional Information

Must be mounted higher than 2.8 metres (714.411.2.201 Provisions for basic protection)



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

