

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 500 V, nominal current: 6.3 A, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.14 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- An extremely compact design
- Test pick-off on both sides in the fuse lever
- Tested for railway applications

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3046032 |
| Packing unit | 50 pc |
| Minimum order quantity | 1 pc |
| Sales key | BE |
| Product key | BE1134 |
| Catalog page | Page 161 (C-1-2019) |
| GTIN | 4017918956578 |
| Weight per piece (including packing) | 16.94 g |
| Weight per piece (excluding packing) | 16.168 g |
| Customs tariff number | 85369010 |
| Country of origin | CN |

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Technical data

Product properties

| | |
|-----------------------|---------------------|
| Product type | Fuse terminal block |
| Area of application | Railway industry |
| | Machine building |
| | Plant engineering |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--|
| Fuse type | Glass / ceramics / ... |
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 1.02 W |
| Fuse | G / 5 x 20 |
| Maximum power dissipation | max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload) |
| | max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload) |
| | max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit) |
| | max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit) |

Connection data

| | |
|---|--|
| Number of connections per level | 2 |
| Nominal cross section | 4 mm ² |
| Screw thread | M3 |
| Tightening torque | 0.6 ... 0.8 Nm |
| Stripping length | 9 mm |
| Internal cylindrical gage | A4 |
| Connection in acc. with standard | IEC 60947-7-3 |
| Conductor cross section rigid | 0.14 mm ² ... 6 mm ² |
| Cross section AWG | 26 ... 10 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 6 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 10 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.25 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 4 mm ² |
| 2 conductors with same cross section, solid | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible | 0.14 mm ² ... 1.5 mm ² |

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

| | |
|---|---|
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1.5 mm ² |
| Nominal current | 6.3 A |
| Maximum load current | 6.3 A (the current is determined by the fuse used) |
| Nominal voltage | 500 V (The voltage is determined by the fuse or selected LED display) |
| Nominal cross section | 4 mm ² |

Dimensions

| | |
|--------------------|---------|
| Width | 6.2 mm |
| Height | 57.8 mm |
| Depth on NS 35/7,5 | 75.6 mm |
| Depth on NS 35/15 | 83.1 mm |

Material specifications

| | |
|---|------------------|
| Color | black (RAL 9005) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 27,5 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Electrical tests

Surge voltage test

| | |
|-----------------------|-------------|
| Test voltage setpoint | 7.3 kV |
| Result | Test passed |

Temperature-rise test

| | |
|-----------------------------------|--------------------------------|
| Requirement temperature-rise test | Increase in temperature ≤ 45 K |
| Result | Test passed |
| Result | Test passed |

Power-frequency withstand voltage

| | |
|-----------------------|---------|
| Test voltage setpoint | 1.89 kV |
|-----------------------|---------|

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

| | |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Mechanical tests

Mechanical strength

| | |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

Attachment on the carrier

| | |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

Test for conductor damage and slackening

| | |
|--------------------------------|-------------------------------|
| Rotation speed | 10 (+/- 2) rpm |
| Revolutions | 135 |
| Conductor cross section/weight | 0.14 mm ² / 0.2 kg |
| | 4 mm ² / 0.9 kg |
| | 6 mm ² / 1.4 kg |
| Result | Test passed |

Environmental and real-life conditions

Needle-flame test

| | |
|------------------|-------------|
| Time of exposure | 30 s |
| Result | Test passed |

Oscillation/broadband noise

| | |
|------------------------|---|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Spectrum | Service life test category 1, class B, body mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$ |
| ASD level | 1.857 (m/s ²)/Hz |
| Acceleration | 0.8g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Semi-sinusoidal |
| Acceleration | 5g |
| Shock duration | 30 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

UT 4-HESI (5X20) - Fuse modular terminal block




3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Drawings

Application drawing

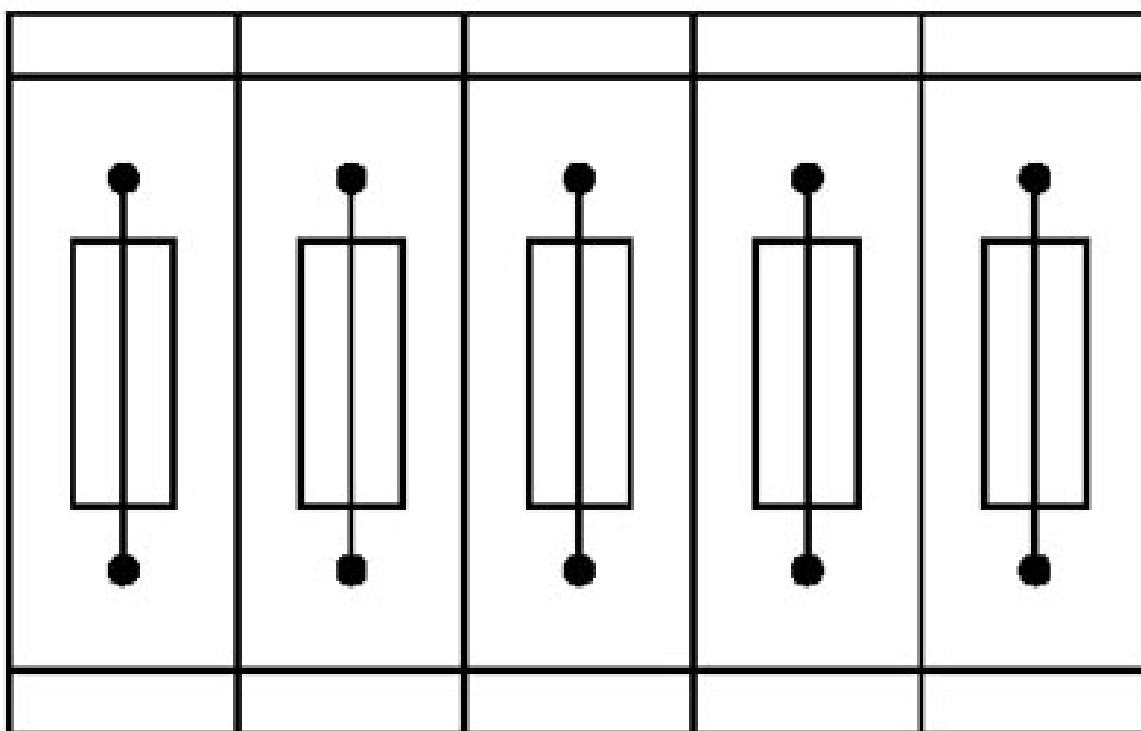


Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Application drawing

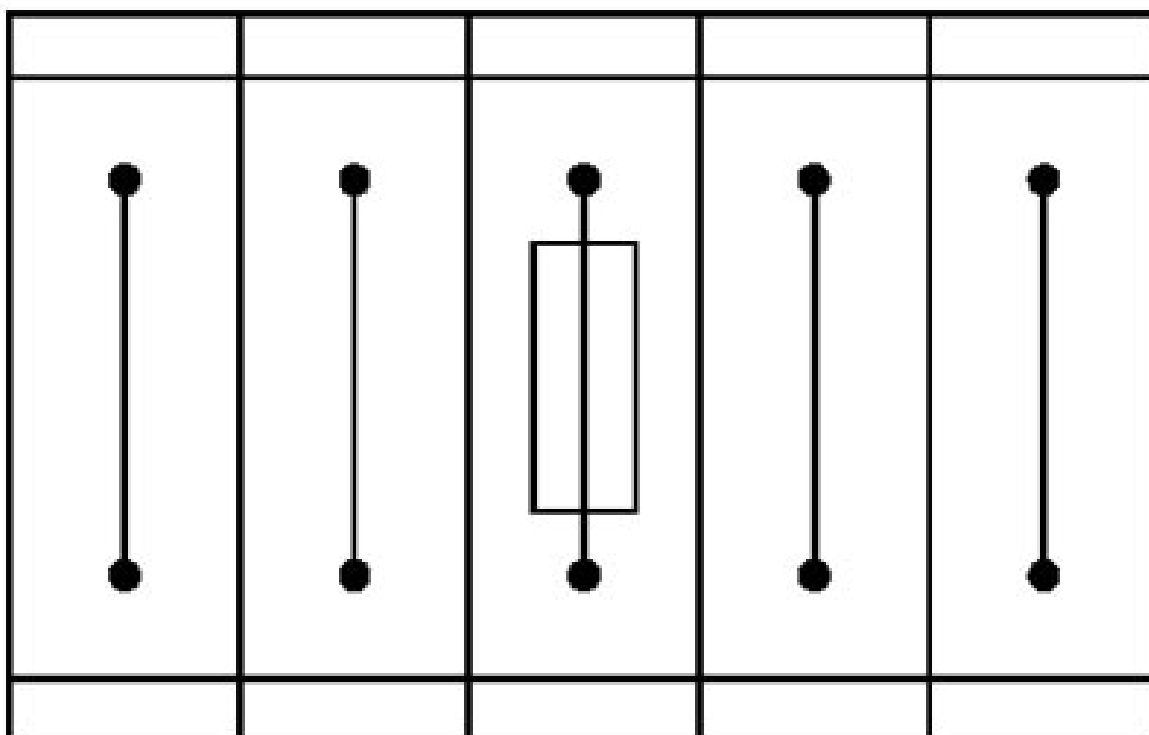

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks


UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Circuit diagram

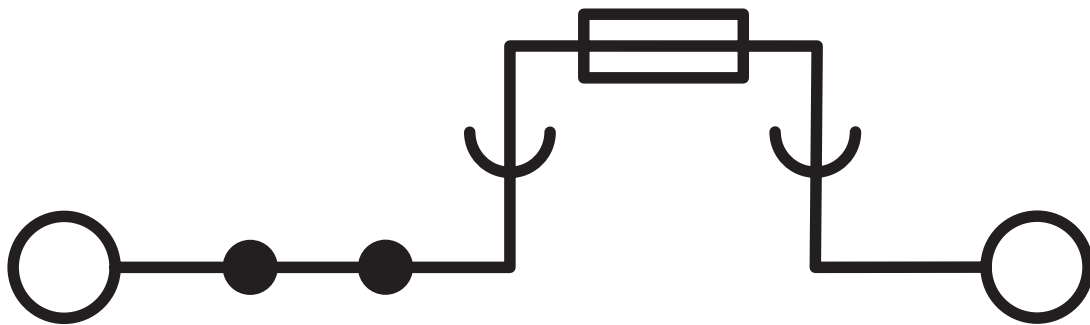

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ie/products/3046032>

DNV

Approval ID: TAE00001S9



CSA

Approval ID: 13631



IECEE CB Scheme

Approval ID: NL-65056

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 500 V | 6.3 A | - | 0.14 - 4 |



EAC

Approval ID: EACKZ 08593



cULus Recognized

Approval ID: E60425



KEMA-KEUR

Approval ID: 71-113330

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 500 V | 6.3 A | - | 0.14 - 4 |



LR

Approval ID: LR24100022TA



CSA

Approval ID: 13631



cULus Recognized

Approval ID: E60425

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141116 |
| ECLASS-12.0 | 27141116 |
| ECLASS-13.0 | 27250113 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000899 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/ie/products/3046032>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| | Lead(CAS: 7439-92-1) |
| SCIP | 8647fab7-370d-40c0-a0c1-f862e400409c |

EF3.0 Climate Change

| | |
|---------|---------------|
| CO2e kg | 0.102 kg CO2e |
|---------|---------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact (Ireland) Ltd
C6 The Exchange, Calmount Park, Ballymount
Dublin 12, D12 XE18
+353/1/2051-300
info@phoenixcontact.ie