


## Oslo Multi-Wattage Standard Datasheet

10/14/20W 1000/1400/2000Lm LED Bulkhead/Ceiling Light

PXOSMSTD

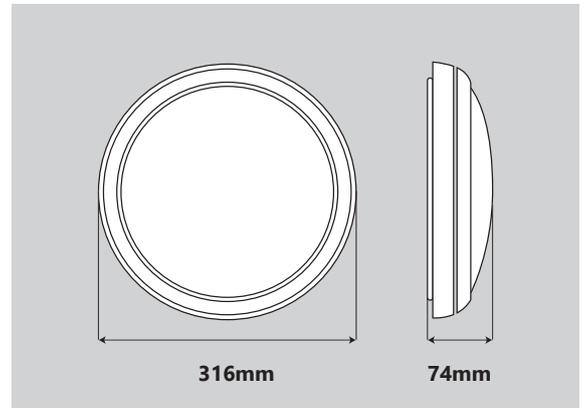

<b>Dimensions</b>	316*316*74mm
<b>Input Voltage</b>	200~240V 50/60Hz
<b>Input Power</b>	10W/14W/20W
<b>Power Factor</b>	≥0.75
<b>Beam Angle</b>	120°
<b>Housing Color</b>	White
<b>Luminous Flux</b>	1000Lm (10W), 1400lm (14W), 2000Lm (20W)
<b>Color Rendering Index</b>	>80
<b>Lifetime</b>	35,000Hrs
<b>Fixture Material</b>	PC & ABS
<b>CCT</b>	3000K / 4000K / 6000K
<b>LEDs</b>	140pcs SMD
<b>Protection Level</b>	IP65
<b>Storage Temperature</b>	-30°C~+60°C
<b>Working Temperature</b>	-20°C~+45°C
<b>Luminous Efficacy</b>	100lm/W
<b>Certification</b>	CE, UKCA
<b>Warranty</b>	5 Years

### Features & Applications

At just 74mm in depth, the Prelux Oslo Multi-Wattage is the slimmest model to date. The compact body coupled with the screwless Twist & Lock cover also makes it a more aesthetically pleasing choice for functional bulkhead lighting.

The Oslo Multi-Wattage comes with 10W/14W/20W options in a single fitting and 3 colour temperatures: warm, cool and daylight for even greater flexibility.

The IP65 protection rating also makes it suitable for an extensive range of applications, including corridors, stairwells and toilet facilities.

Bezel accessories include black eyelid, white eyelid or chrome effect (to be ordered separately).